




2: 0.78 A  
3: 1.02 A  
- : 6  
(IEC 34-5): X2D  
(IEC 85): F

:  
:  
( ): 4.4  
4.6  
: 0.006 <sup>3</sup>


C

: CN  
: 8413703000

**52588336 UPS 25-120 180 50**

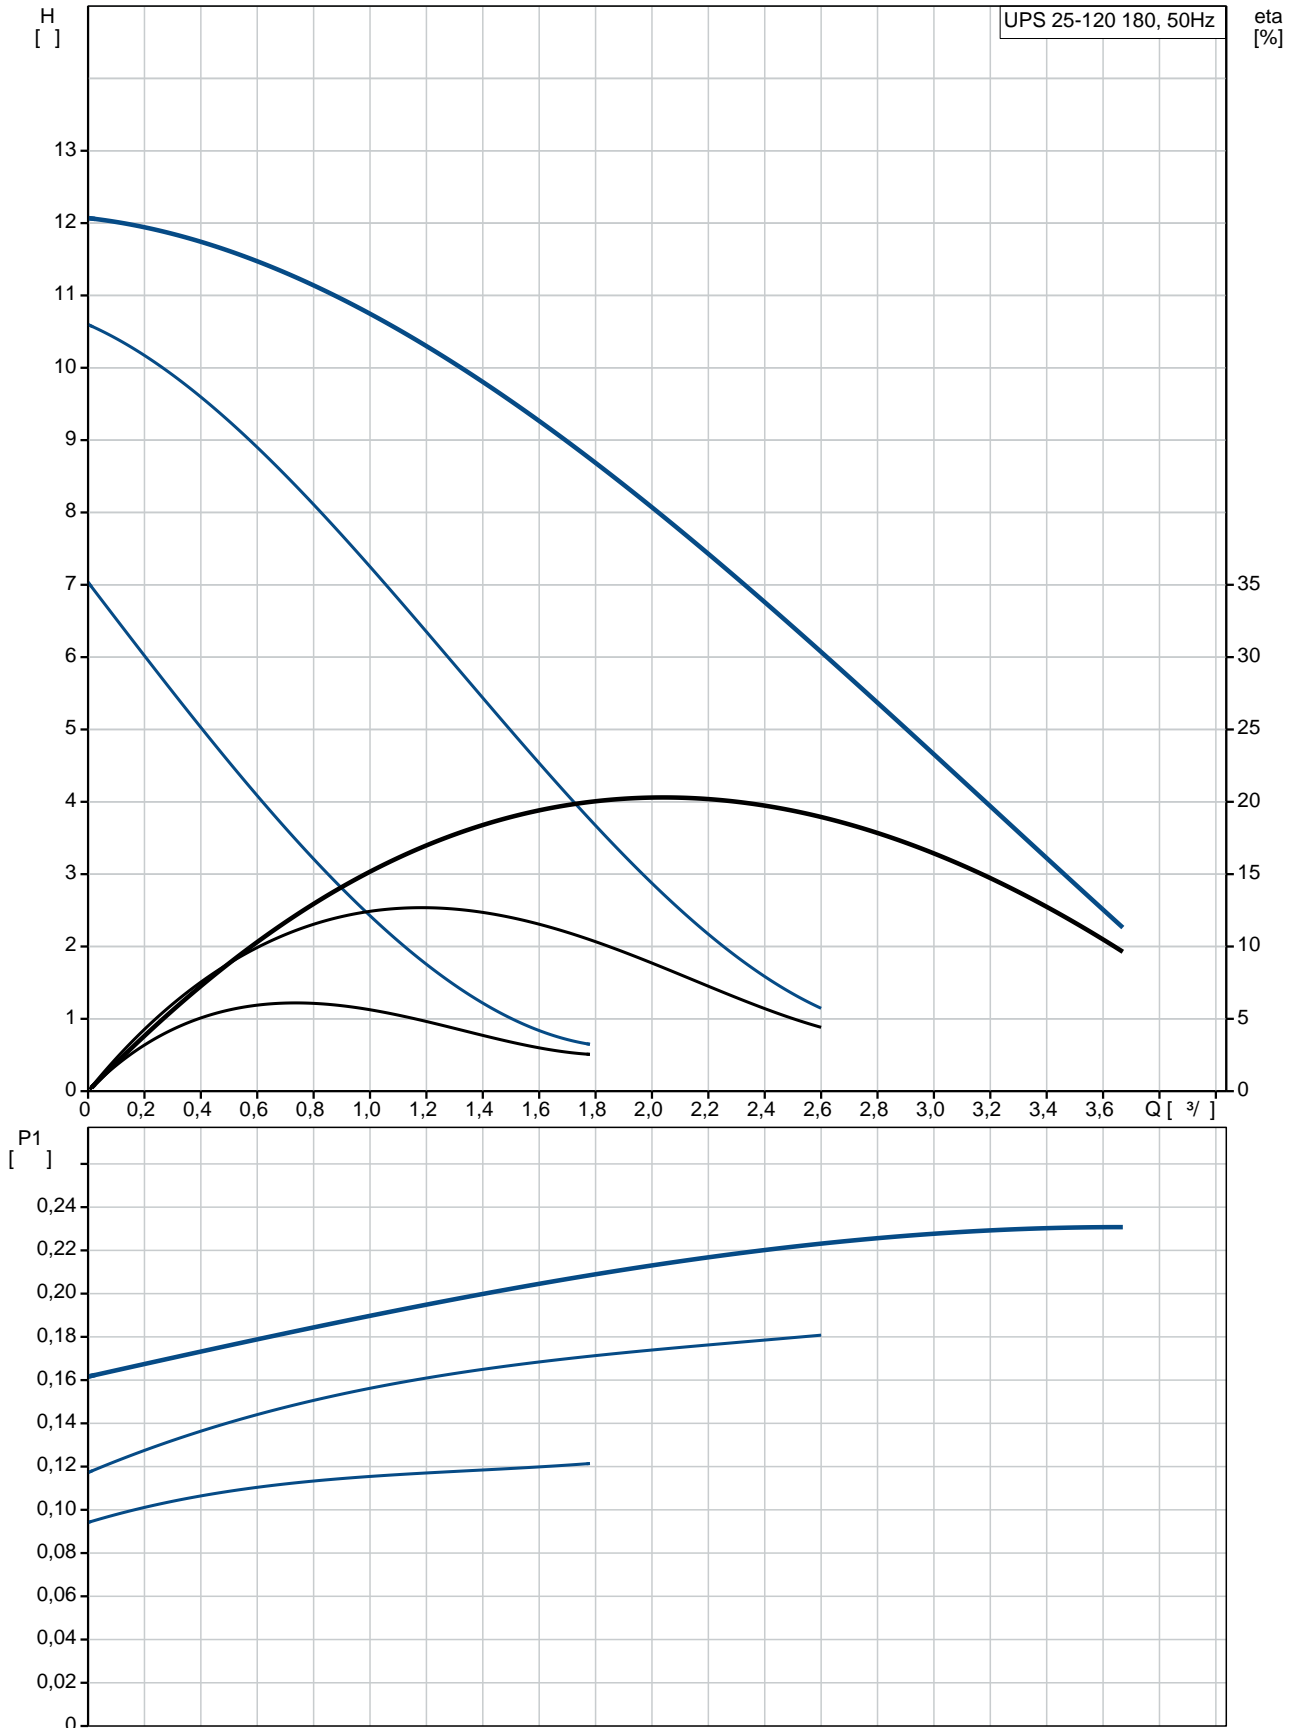

UPS 25-120 180	
52588336	
EAN	5700394227377
	5700394227377
	254,00 UER
	3
	120
TF	95
	AAA,EAC
	EN-JL1030
	ASTM 30 B
	, PES/PP
80 OC:	80 °C
	10
	G 1 1/2
	PN 10
	180
	-25 .. 95 °C
	60 °C
	983.2 / ³
	1: 120
	2: 180
	235
	50 Hz
	1 x 230
	1: 0.53 A
	2: 0.78 A
	3: 1.02 A
	6
(IEC 34-5):	X2D
(IEC 85):	F
	CONTACT
	9H
	4.4
( ):	4.6
	0.006 ³
C	CN
	8413703000

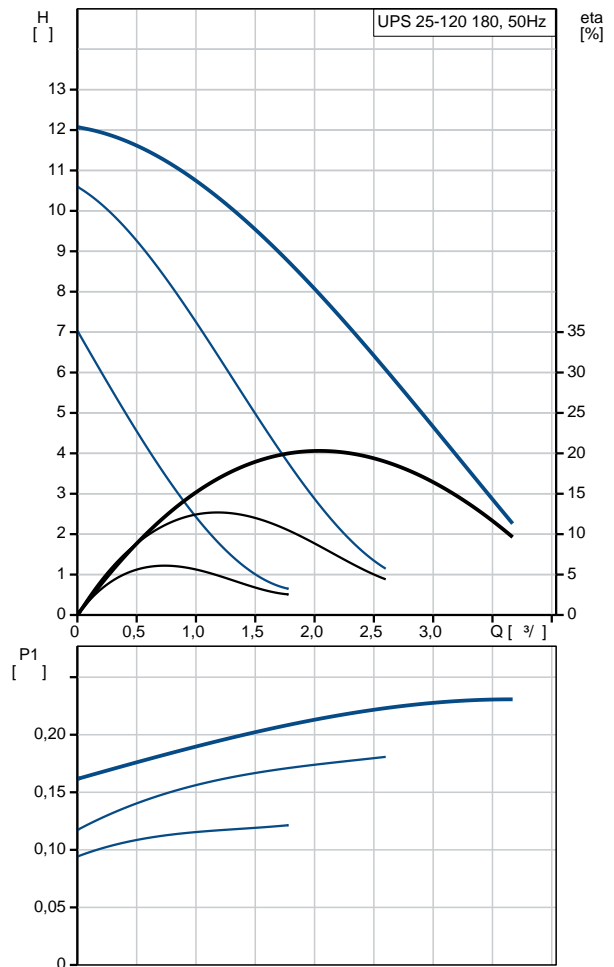

**52588336 UPS 25-120 180 50**

