

1 SCALA2 3-45 A



: [98562862](#)

SCALA2 Grundfos

. SCALA2

SCALA2

- 1.
- 2.
- 3.

SCALA2

- ;
- ;
- ;
- 0,65 ;
-

8

5

5

8

24

,47 ()


53 ()

SCALA2




:

: : 0 .. 45 °C
 : : 20 °C
 : 998.2 / ³
 :
 : 3 ³/
 : 27
 : CARBON/CERAMIC
 Approvals on nameplate: CE,VDE,AAA
 Approvals for drinking water: WRAS,ACS
 - : ISO9906:2012 3B
 :
 : ()FE1630PW PPE+PS-GS30
 : ()FE1630PW PPE+PS-GS30
 :
 : : 0 .. 55 °C
 : 10
 Maximum permissible inlet pressure: 6
 : G 1 Composite
 :
 - P1: 550
 : 50 Hz
 : 1 x 200-240
 : 2.8 A
 (IEC 34-5): IPX4D
 (IEC 85): F
 : 2
 Power plug: Type E/F (CEE7/7)
 :
 : 9.55
 : 11.9
 : 0.044 ³
 : -40 .. 70 °C
 Danish VVS No.: 385183145
 Swedish RSK No.: 5931159
 Finnish: 4732505
 Norwegian NRF no.: 9040011
 C : RS
 : 8413708900

98562862 SCALA2 3-45 50

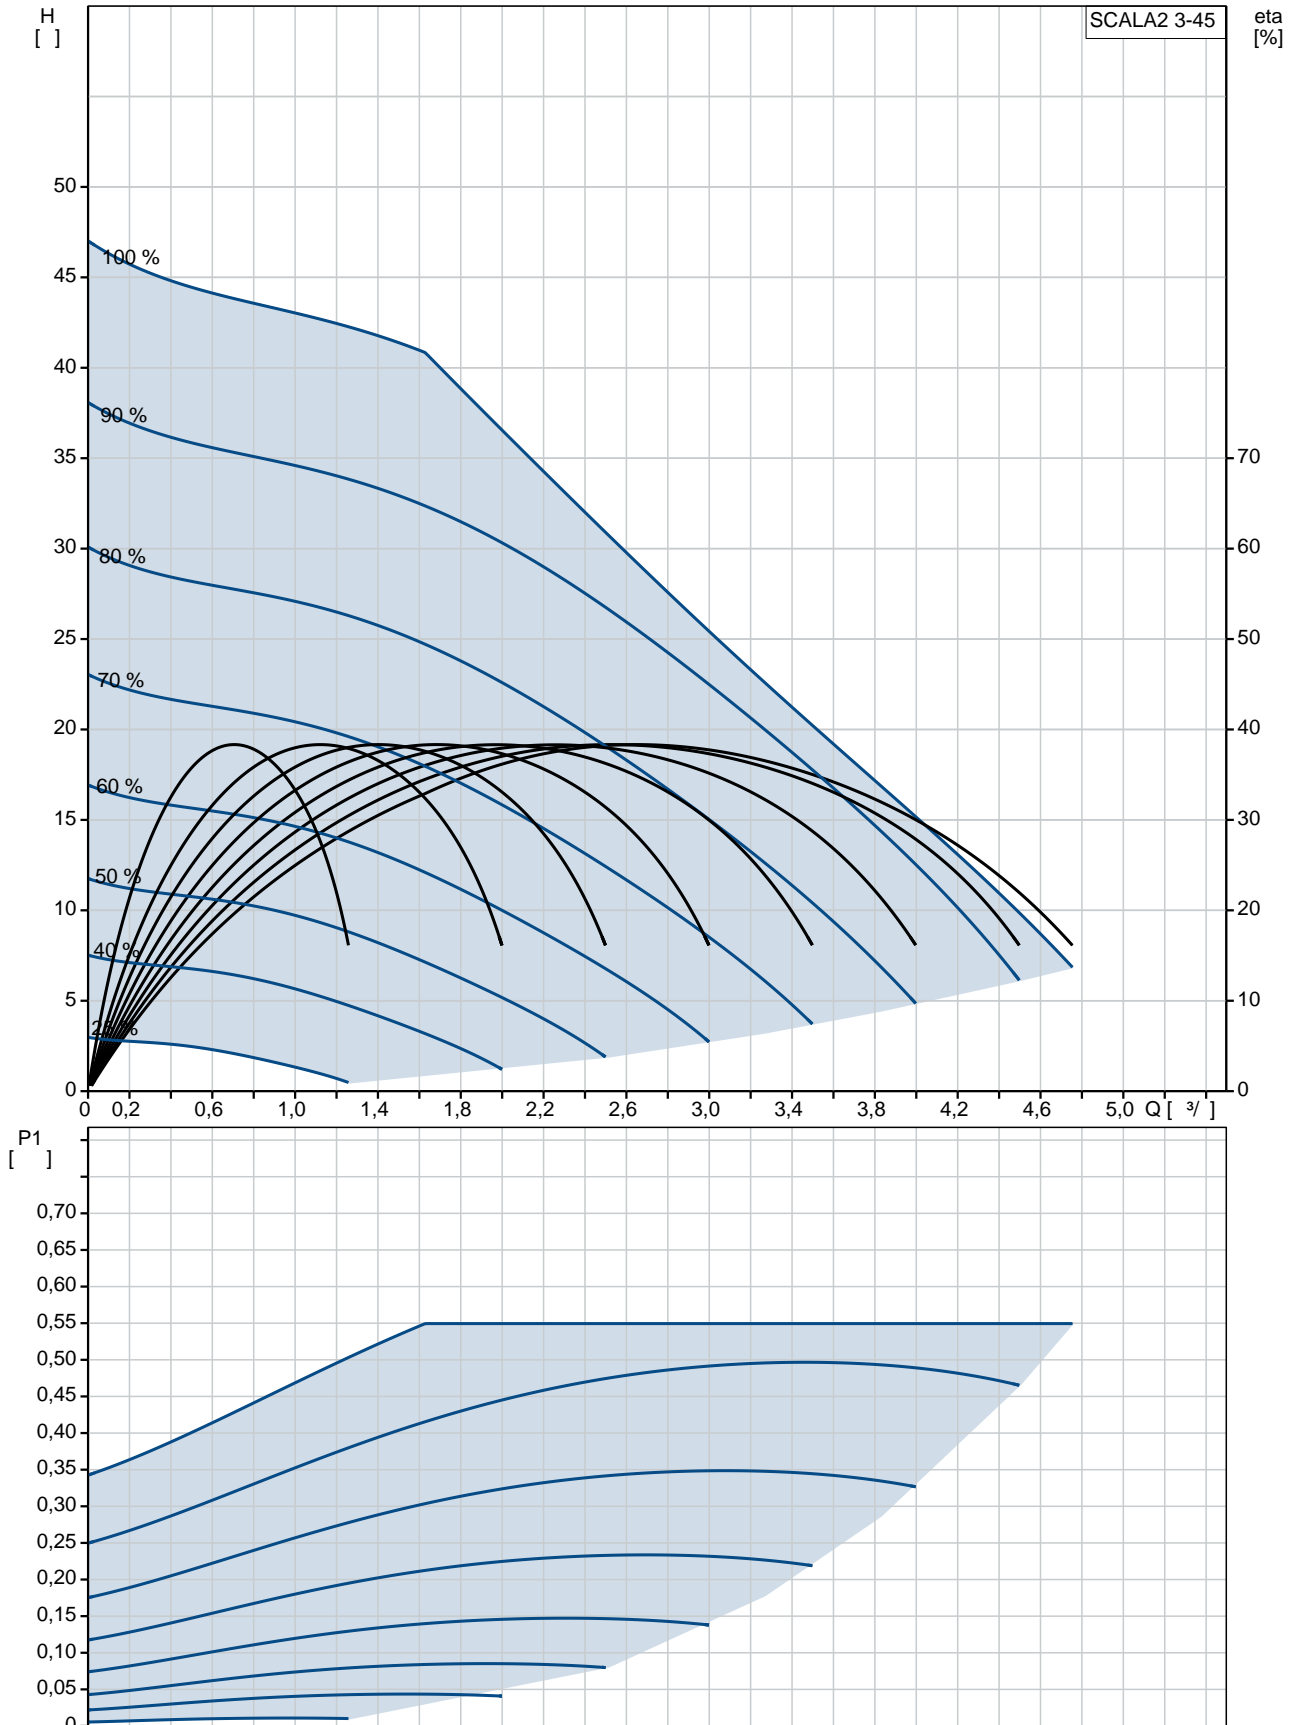

		SCALA2 3-45 A
		98562862
EAN	:	5711497234216
		3 ^{3/4}
		27
		45
		CARBON/CERAMIC
Approvals on nameplate:	:	CE, VDE, AAA
Approvals for drinking water:	:	WRAS, ACS
	:	ISO9906:2012 3B
	:	A
		() FE1630PW PPE+PS-GS30
		A
		0 .. 55 °C
		10
Maximum permissible inlet pressure:	:	6
	:	G 1 Composite
		0 .. 45 °C
		20 °C
		998.2 / ³
	:	- P1: 550
	:	50 Hz
	:	1 x 200-240
	:	2.8 A
(IEC 34-5):	:	IPX4D
(IEC 85):	:	F
	:	2
Power plug:	:	Type E/F (CEE7/7)
		9.55
		11.9
		0.044 ³
		-40 .. 70 °C
Danish VVS No.:	:	385183145
Swedish RSK No.:	:	5931159
Finnish:	:	4732505
Norwegian NRF no.:	:	9040011
C	:	RS
	:	8413708900

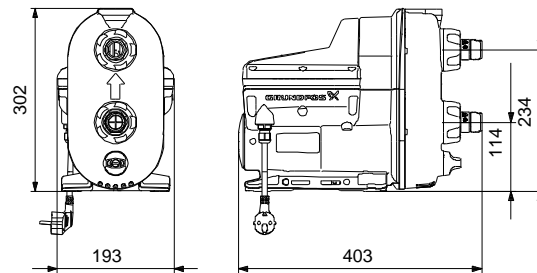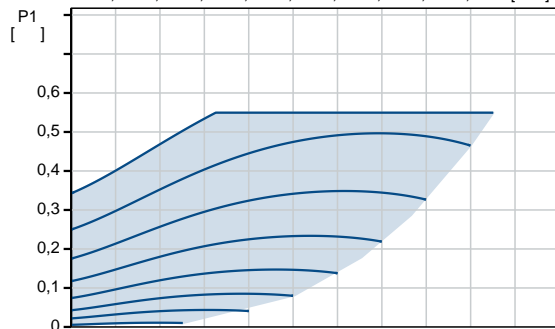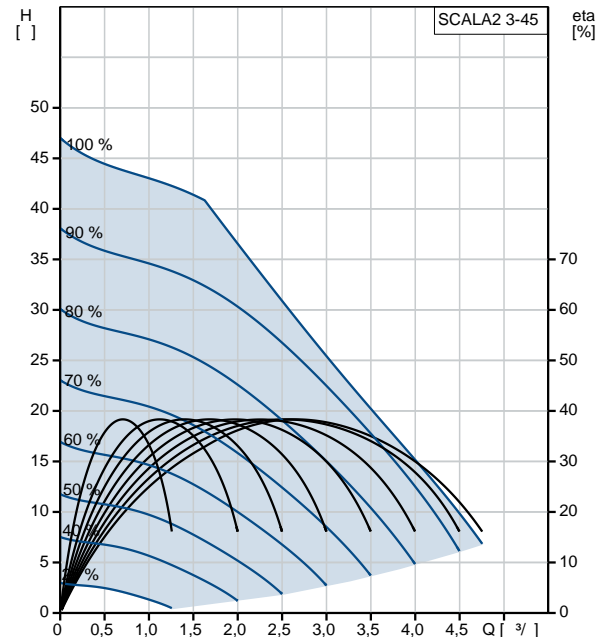

98562862 SCALA2 3-45 50

