

1 **SEG.40.31.E.2.50B**



: 96878518

SmartTrim

AUTOADAPT

AUTOADAPT:

AUTOADAPT:


: 0 .. 40 °C
998.2 / ³

: 3.5 /
: 25.99


: SIC/SIC
: CARBON/CERAMICS
- : ISO9906:2012 3B2

	:		EN-GJL-200	
	:		EN-GJL-200	
	:			: 40 °C
	:		6	
	:		DIN	
	:		DN40/50	
	:		DN 40	
	:		PN10	
	:		: 10	
	:		: 96076063	
	:			
	:		- P1: 3.9	
	:		- P2: 3.1	
	:		: 50 Hz	
	:		: 3 x 400-415	
	:		+6/-10 %	
	:		30	
	:		6.3/6.3 A	
	:		43 A	
	:			: 3.1 A
Cos phi -	-	:	0.86	
Cos phi -	.	:	3/4	: 0.81
Cos phi -	.	:	1/2	: 0.71
	:	:	2900 /	
	:	:	0.01 ²	
	:	:		: 84 %
	:	:	3/4	: 82 %
	:	:	1/2	: 79 %
	:	:	2	
	:	:		
	:	:	(IEC 34-5): IP68	
	:	:	(IEC 85): F	
	:	:		
	:	:	10	
	:	:	LYNIFLEX	
	:	:	NO PLUG	
	:	:		
	:	:	62.3	
	:	:	HU	
	:	:	8413702100	

96878518 SEG.40.31.E.2.50B 50

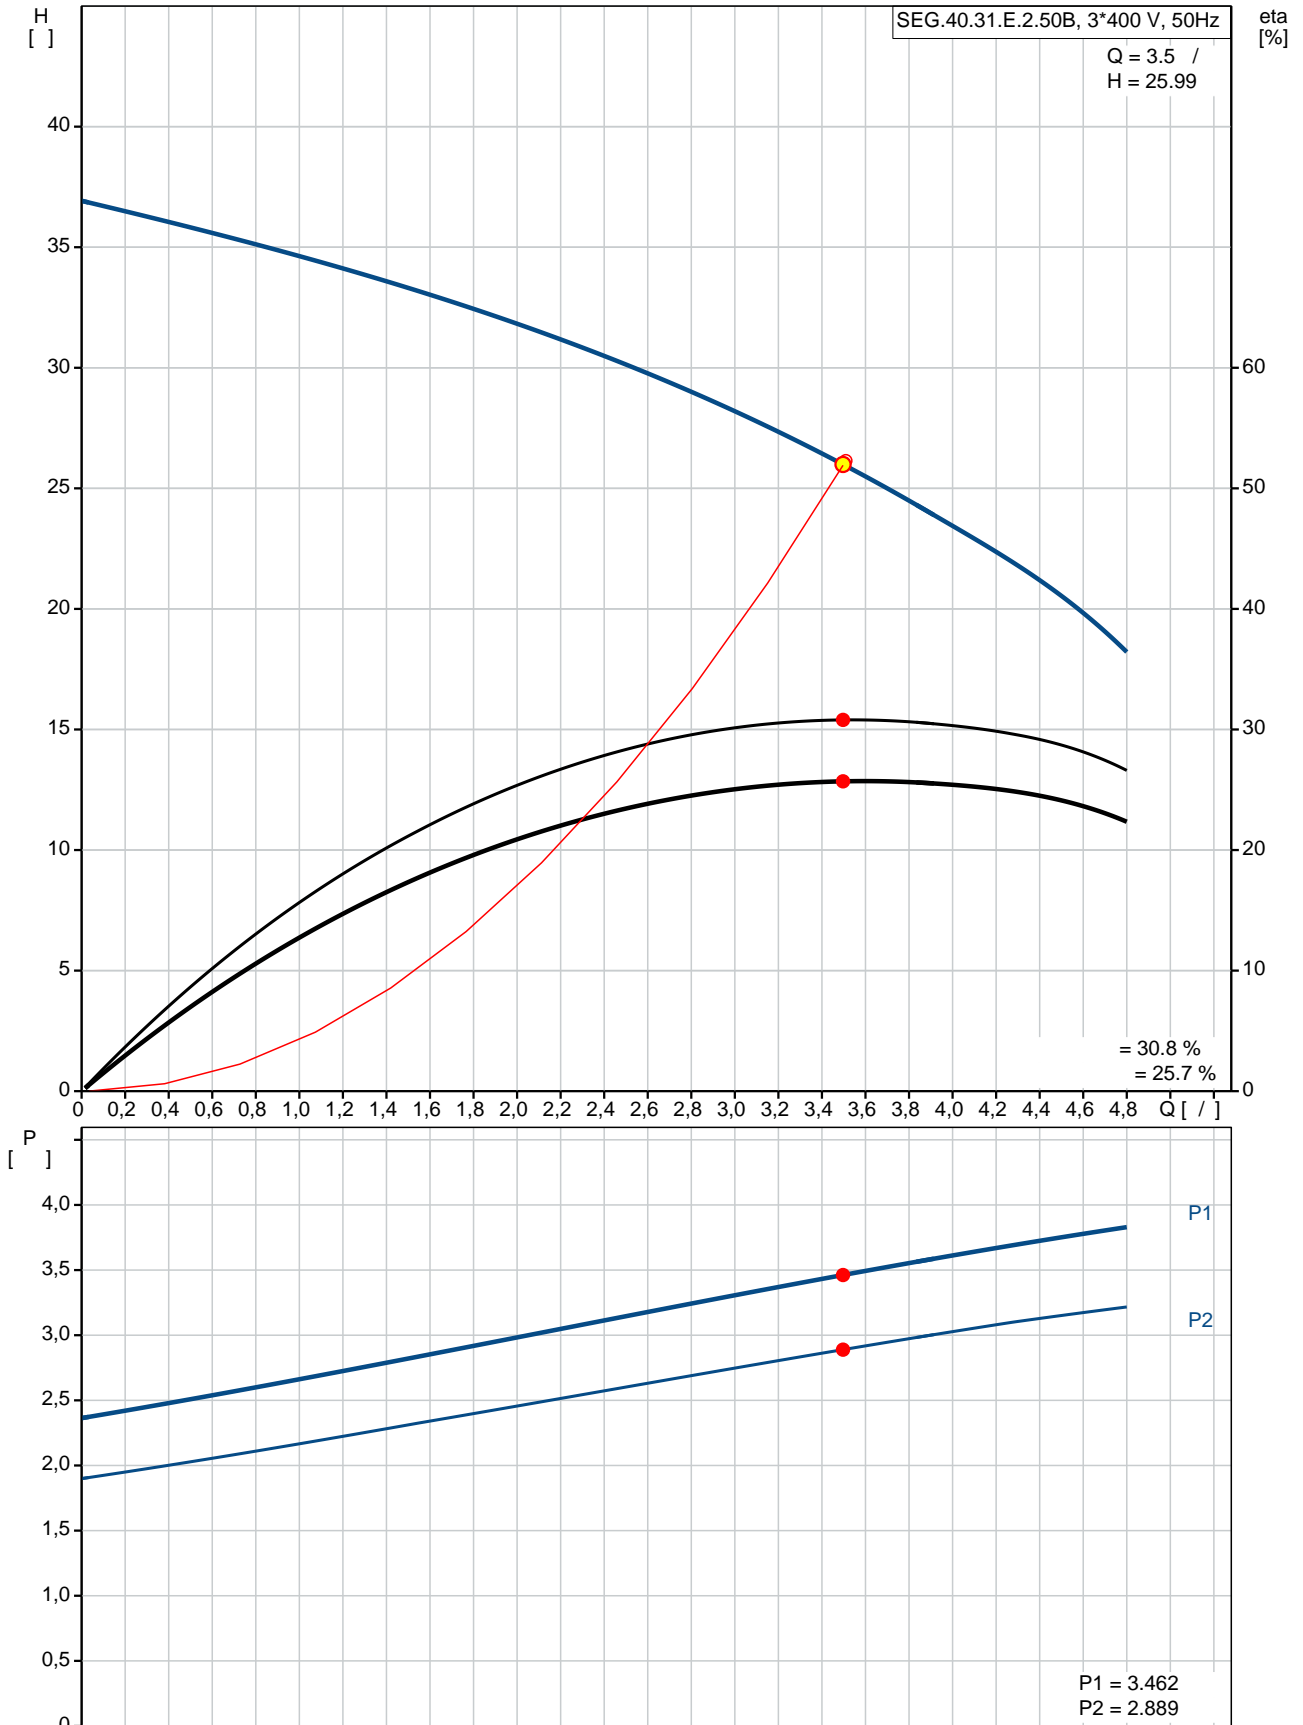

			SEG.40.31.E.2.50B
			96878518
EAN	:		5700312551317
			3.5 /
Ma	:		4.75 /
			25.99
			37
			SIC/SIC
			CARBON/CERAMIC
			S
			ISO9906:2012 3B2
			EN-GJL-200
			EN-GJL-200
			40 °C
			6
			DIN
			DN40/50
			DN 40
			PN10
			10
			SUBMERGED
			96076063
			0 .. 40 °C
			998.2 / ³
			- P1: 3.9
			- P2: 3.1
			50 Hz
			3 x 400-415
			+6/-10 %
			30
			6.3/6.3 A
			43 A
			3.1 A
Cos phi	-		0.86
Cos phi	-	3/4	0.81
Cos phi	-	1/2	0.71
			2900 /
			0.01 / ²
			84 %
			3/4 : 82 %
			1/2 : 79 %
			2

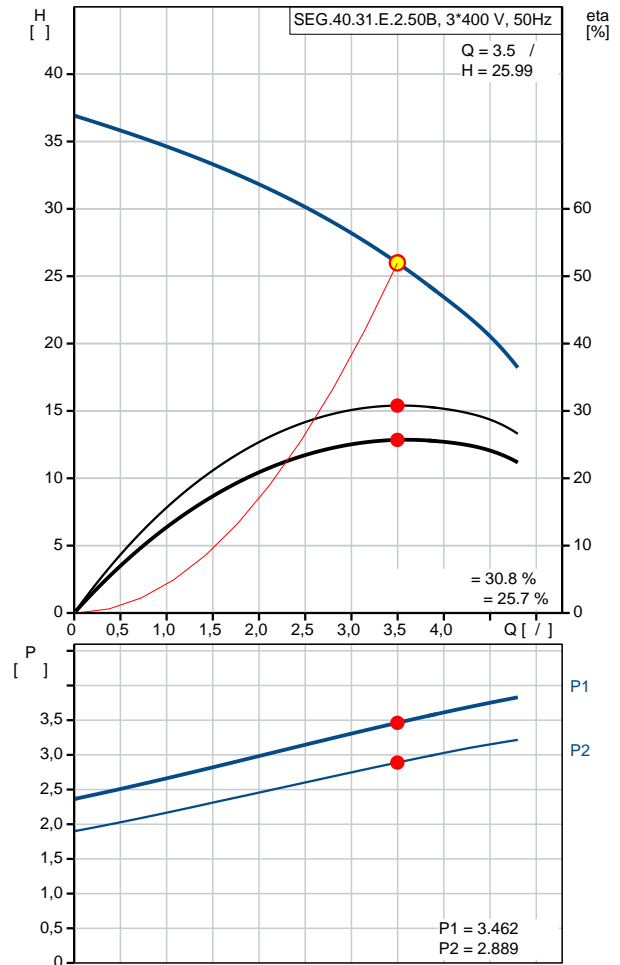

(IEC 34-5):	IP68
(IEC 85):	F
:	:
:	:
:	:
:	10
:	LYNIFLEX
:	NO PLUG
:	:
I/O:	Build in
:	:
AUTOADAPT:	
:	:
:	62.3
C	HU
:	8413702100